

Humidity Transmitters

Introduction

The Series RH/RHL is a two wire transmitter with 4-20 mA loop powered output or 0 to 10VDC output. The state of the art sensor recovers from 100% saturation and is calibration free.

Features

- Long term stability
- Selectable temperature units
- RH models $\pm 2\%$ accuracy
- RHL models $\pm 3\%$ accuracy
- Dual outputs on humidity/temperature models
- LCD Display available on Duct model
- Completely recovers from 100% saturation




Applications

- Room temperature/humidity monitoring
- Supply air temperature/humidity monitoring
- Exhaust air temperature/humidity monitoring
- Outside air temperature/humidity monitoring

Models Available & Specifications

Model	Description
IHX-RHUW	Wall Mount Humidity only Transmitter $\pm 2\%$
IHX-RHTW	Wall Mount Humidity & Temperature Transmitter $\pm 2\%$
IHX-RHUD	Duct Mount Humidity only Transmitter $\pm 2\%$
IHX-RHTD	Duct Mount Humidity & Temperature Transmitter $\pm 2\%$
IHX-RHTD-LCD	Duct Mount Humidity & Temperature Transmitter $\pm 2\%$ c/w LCD display

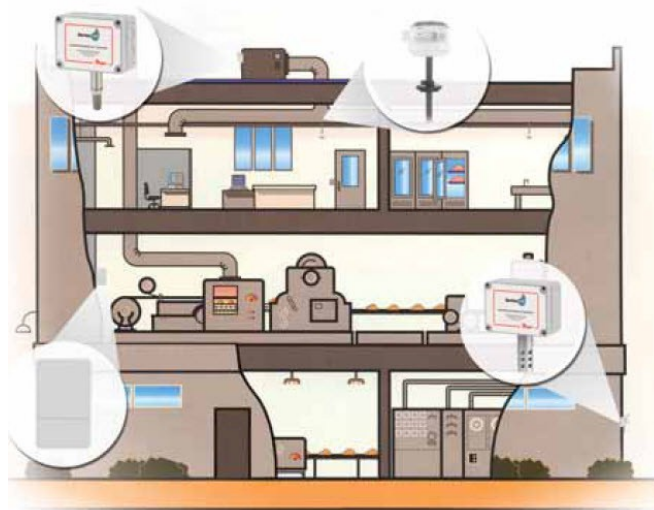

Postal Address

Homersham Ltd
PO Box 280
Christchurch 8140
NEW ZEALAND

Phone: 03 3588309
Phone: 0800 659888

Website: www.homershams.co.nz

Delivery Address

Homersham Ltd
3 Homersham Place
Burnside
Christchurch 8053
NEW ZEALAND

Fax: 03 3582516
Fax: 0800 659777

E-mail: info@homershams.co.nz

132

