

Center 340 & 342 Loggers

Introduction

Even though these units focus on data collecting, they have a LCD display for local indication. The data is downloaded via an Infrared photo interface enabling the 340 to be waterproof.

Specifications

Temp Range:	-30 to 70 °C
Humidity Range:	5 to 98 %RH (342 only)
Accuracy:	±0.7°C, ±3%RH
Resolution:	0.1°C, 0.1%RH
Memory:	64,000 Records for 340 32,000 Records per channel for 342

Features


- LCD with Backlight
- Battery Status Display
- Memory Status Display
- 340 is waterproof



LED Back Light



340

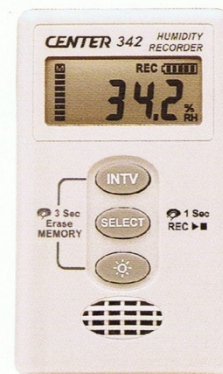

342

Applications

- Environmental monitoring
- Food Transportation
- HVAC monitoring

Models Available

Code	Description
IDL-C340	Temperature Datalogger
IDL-C342	Temperature/Humidity Datalogger
IDL-C345	Communication Download Base & Software



Center 345 Communication Base

Postal Address
Homersham Ltd
PO Box 280
Christchurch 8140
NEW ZEALAND

Phone: 03 3588309
Phone: 0800 659888

Website: www.homershams.co.nz

Delivery Address
Homersham Ltd
3 Homersham Place
Burnside
Christchurch 8053
NEW ZEALAND

Fax: 03 3582516
Fax: 0800 659777

E-mail: info@homershams.co.nz

132

