

## Level Sensors - Reifa Cable Suspended Float Switch

### Introduction


The Reifa® is a device, which regulates fluid level in a tank or well by controlling the pump or valve. It is available in 3 or 10 metre cable lengths.

### Specifications


Microswitch Rating:	250 V ~ 400 V ~ 16(8)A 16(4)A ≥50,000 switch workings
Protective connection:	Double Insulated
Max. Temperature:	70°C
Max. Pressure:	1 bar
Material:	
Case:	Polypropylene-Copolymerisate
Cable:	Neoprene
Float switch is not explosion proof	

### Features


- Double Insulated
- Easy to Install
- Adjustable
- Maintenance Free
- Reliable
- Automatic



To fill : Core connection brown/black



To empty: Core connection brown/blue

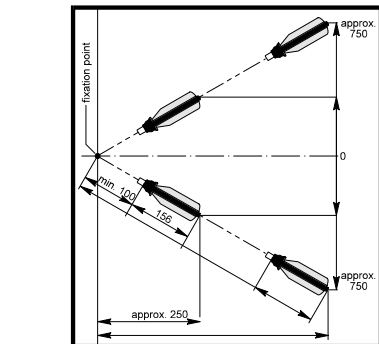



Installation diagram

### Easy Operation

The desired "ON" or "OFF" differential is obtained by simply lengthening or shortening the free cord length between float switch and cord fixation point. "ON" and "OFF" switch action may be adjusted to any desired liquid level by moving the cord fixation in up or down direction.

### Applications

- Sewage Water Level
- Potable Water Level
- Oils
- Most Acid and Alkalis
- Sump Levels

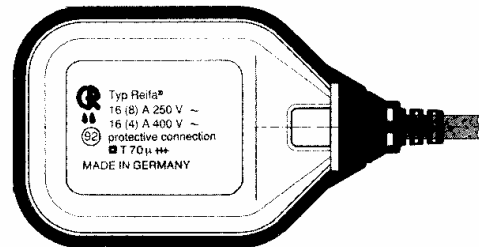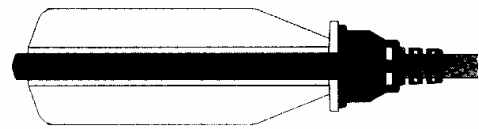

**Postal Address**  
Homersham Ltd  
P.O. Box 280  
CHRISTCHURCH 8015  
NEW ZEALAND

Phone: 03 3588309  
Phone: 0800 659888

Website: [www.homershams.co.nz](http://www.homershams.co.nz)

**Delivery Address**  
Homersham Ltd  
3 Homersham Place  
CHRISTCHURCH 8005  
NEW ZEALAND

Fax: 03 3582516  
Fax: 0800 659777

E-mail: [info@homershams.co.nz](mailto:info@homershams.co.nz)  
Section 4



Temperature  
Pressure